

Installation & Operations Manual Kubota RTV 500 Soft Top & Rear Panel



Seizmik makes Windshields, Doors, Tops, Hood Racks, Brush Guards, and other great accessories for utility vehicles & side x sides. Our products are engineered tough for long life and tested under the harshest of conditions. Always observe the warnings and precautions in this manual when using your Seizmik products. For best results, carefully follow the instructions in this manual and make no modifications.

Seizmik products are designed, developed and manufactured by Vialink Corp. If you have any questions, comments, need assistance, or are missing parts, please call 1-866-838-3366 ext. 110 between 9:00AM and 5:00PM EST. You can email us at support@seizmik.com.

How to use this manual:

- Be sure to read through the entire manual carefully before beginning installation.
- Read all warnings and precautions carefully and follow safety procedures
- Each Seizmik product has a "difficulty-to-install" rating based on the following:
 - Easy – uses basic hand tools and does not require any modifications to the existing structure of your vehicle. Most Seizmik products fall into this category. Hey, why be difficult?
 - Skilled – requires a little more skill to install properly. May require modifications to the vehicle (drilling, electrical, etc. as well as the use of power tools.
 - Difficult – May require welding or extensive mechanical work for proper installation. Hardly any Seizmik products fall into this category but we had to say it.
- Watch for the following symbols:



CAUTION – Indicates an installation or operational step or procedure that if not followed could result in damage to the product or you. Use caution when you see this symbol and follow all instructions.



TIP – Indicates an installation or operation tip. These tips can help you avoid installation problems, ensure safe and easy operation, and make sure everything goes smoothly.



WARNING – Indicates an installation or operational procedure that must be observed to prevent serious injury or death.

Installation information:

- This product has an installation rating of: **Easy**
- Approximate installation time: **5 Minutes**
- This product is easiest to install with: **1 Person**


Trailer Info:

ONLY trailer with rear window open and top fully and properly secured.
MAX SPEED – 55 MPH

RTV 500 Soft Top Installation (continued)



1. Lay the soft top over the roll cage of the vehicle making sure the straps are on the outside of the ROPS.

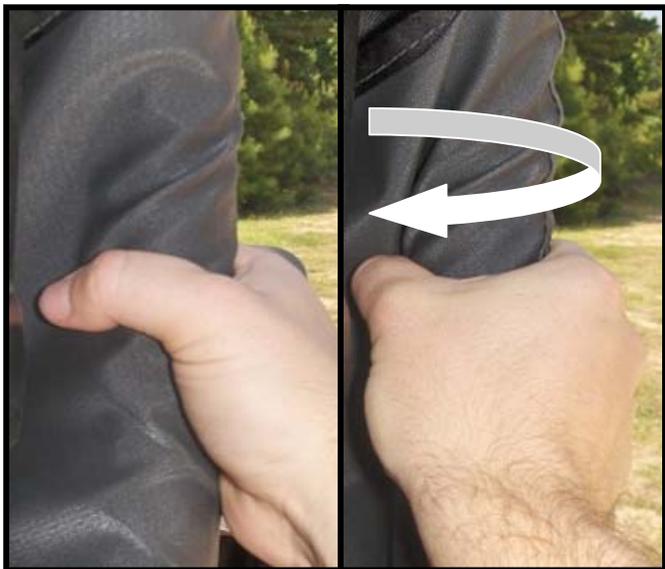

2. Locate the velcro straps running down the length of the rear vertical ROPS bar. Fasten around the bar. Repeat this step for the opposite side.

Tip – A good way to get the straps tight is to rotate the top around the bar like in the picture on the right.



3. Locate the straps, fasten and pull tight..



4. Allow the back side to drape between the dump bed and the seat.

RTV 500 Soft Top Installation (continued)



5. Locate the velcro at the base of the soft top with the adhesive velcro strip. Remove the backing to the adhesive and adhere to the horizontal rectangular bar behind the seat..



Some adjustment may be necessary to ensure a proper fit.

Congratulations – You have now finished the installation of your Seizmik RTV500 Soft Top.

Kubota RTV500 Soft Top Features



A – The rear window can be rolled up by undoing step 2, rolling the window up from the bottom, and securing with the three straps at the top of the window as shown.



B – The velcro strip along the front of the soft top is so it can be attached to a windshield by removing the adhesive backing and adhering the velcro to the top of the windshield.

How to get Help - If you have any questions, comments, need assistance, or are missing parts, please call 1-866-838-3366 ext. 110 between 9:00AM and 5:00PM EST. You can email us at support@seizmik.com, visit www.seizmik.com to download installation guides and product info, or contact your powersports dealer where you purchased your Seizmik product if you need additional assistance.